

Marine Air Blower 750 Inline 165, Inline 250 12 V / 24 V


- · Inline mounted axial blower for marine ventilation
- · Flexible, bulkhead installation, with compact and simple design
- 178 mm (7") hose connection, capacity 750 m³/h (442 ft³/min)
- Advanced five-blade design for maximum flow and performance
- Quiet operation and low power consumption
- Long motor service life from powerful airflow cooling
- Structurally reinforced housing resists deformation during installation and protects the blades from interfering with housing
- · For continuous duty
- · Meets Electrical Regulations, ISO 8846,10133, 9097 and CE Conforms with EN 55014 for suppression of Electro-magnetic interference

The Albinus Marine Air Blower 750 Inline is for axial, inline mounting through a bulkhead.

Electrical Connection

WIRING: Use stranded copper wire. For lengths up to 25 feet (7.6 m) from power source: Use 2 mm. wire for 12 volt and 1.5 mm wire for 24 volt. Use larger wire for longer lengths.

Circuit must be protected with a fuse; see fuse info together with part number and product information above.

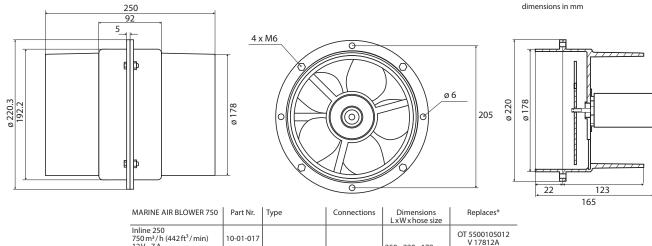

| MARINE AIR BLOWER 750 | Part Nr. | Туре | Connections | Dimensions LxWxhose size | Replaces* |
|---|-----------|---|---------------------|--------------------------------|---------------------------|
| Inline 250 750 m³/h (442 ft³/min) 12 V • 7 A | 10-01-017 | Inline mounted, axial flow blower for marine ventilation, through | 178 mm (7") hose | 250x220x178mm 9.8x8.7x7in | OT 5500105012 V 17812A |
| Inline 250 750 m³/h (442 ft³/min) 24V • 3.5 A | 10-01-018 | | | | OT 5500105024 V 17824A |
| Inline 165 750 m³/h (442 ft³/min) 12V•7 A | 10-01-019 | | | 165×220×178 mm 6.5×8.7×7 in | OT 5500105512 |
| Inline 165 750 m³/h (442 ft³/min) 24V • 3.5 A | 10-01-020 | | | | OT 5500105524 |

OT = Ocean Technologies V = Vetus

WARRANTY

One year limited warranty



ISO 8846 ISO 10133



